

FP12260(12V26AH)




● Specifications

Nominal Voltage		12V
Rated capacity (20 hour rate)		26 Ah
Dimensions	Total Height	125 mm (4.92 inches)
	Height	125 mm (4.92 inches)
	Length	175 mm (6.89 inches)
	Width	166 mm (6.54 inches)
Weight Approx		8.1 Kg (17.8 lbs)


● Characteristics

Capacity 25°C(77°F)		20 hour rate(1.30A)	26.0AH
		10 hour rate(2.40A)	24.0AH
		5 hour rate(4.40A)	22.0AH
		1 hour rate(15.6A)	15.6AH
		1.5 hour discharge to 10.5V	10.4 A
Internal Resistance		Full charged Battery at 25°C(77°F)	9.5mΩ
Capacity affected by Temperature (20hour rate)		40°C(104°F)	102%
		25°C(77°F)	100%
		0°C(32°F)	85%
		-15°C(5°F)	65%
Self-Discharge at 25°C(77°F)		Capacity after 3 month storage	91%
		Capacity after 6 month storage	82%
		Capacity after 12 month storage	64%
Terminal		T4	
Charge (constant Voltage)	Cycle	Initial Charging Current less than 10.4 A Voltage 14.40-15.00V Time 14~16h	
	Float	Voltage 13.50-13.80V	


● Outer dimensions (mm)

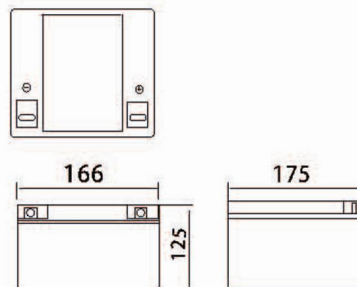

● Terminal Type (mm)



● Discharge Curves 25°C (77°F)

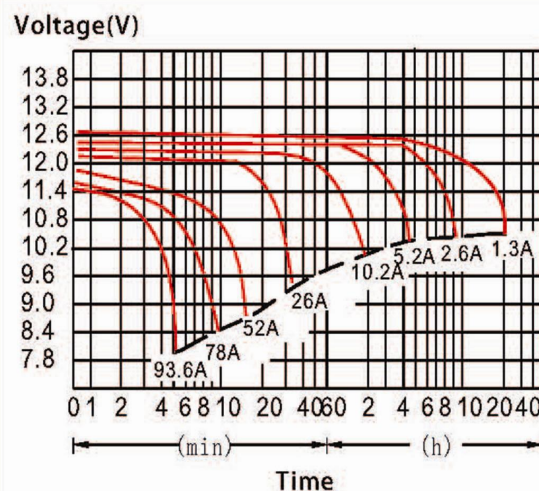

Constant Current(Amp) and Constant Power(Watt) Discharge Table at 25℃(77℉)

Time		5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	A	93.6	61.4	45.5	29.9	15.6	9.10	6.70	5.37	4.56	3.01	2.46	1.34
	W	972	659	488	321	168	99.9	74.5	60.5	51.9	34.5	28.4	15.6
10.20V	A	85.8	58.7	41.8	28.4	14.6	8.73	6.50	5.20	4.47	2.96	2.42	1.31
	W	921	656	468	319	166	100.6	75.3	60.5	52.2	34.6	28.4	15.4
10.50V	A	78.1	54.9	39.0	27.5	14.2	8.56	6.39	4.94	4.42	2.93	2.39	1.30
	W	858	624	445	317	164	99.3	74.5	57.8	51.8	34.4	28.3	15.4
10.80V	A	75.1	52.4	36.4	26.8	13.7	8.34	6.28	4.85	4.23	2.85	2.33	1.27
	W	842	605	419	310	159	97.7	74.1	57.3	49.9	33.8	27.7	15.1
11.10V	A	69.4	49.4	33.8	26.0	13.2	8.13	5.96	4.77	4.04	2.77	2.28	1.24
	W	787	572	393	304	155	96.0	70.8	56.8	48.2	33.2	27.5	15.0